


INSTALLATION INSTRUCTIONS NOTICE D'INSTALLATION

AC surge protector Type 2 (or Type 3) for LED lightingsystem.

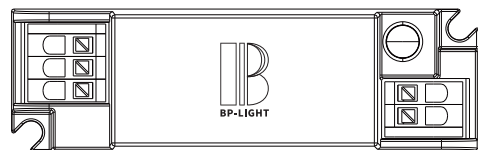


BP-SPD10KV-1
BP-SPD10KV-1/II


Technical Data

Table 1	P/N	
 2000 m max. 6500 ft max.	BP-SPD10KV-1	BP-SPD10KV-1/II
 -40/+85°C max. -40/+185°F max.		
 Humidity range 5% to 95%		
AC network		
220 - 240 Vac single phase	●	●
AC system	TN	
Characteristics		
Connection by screw	●	●
Max Discharge Current (8/20) - I _{max} (L-N/N-PE) [kA]	5 kA	
I _{PE}	no current	
IP54		


Application example

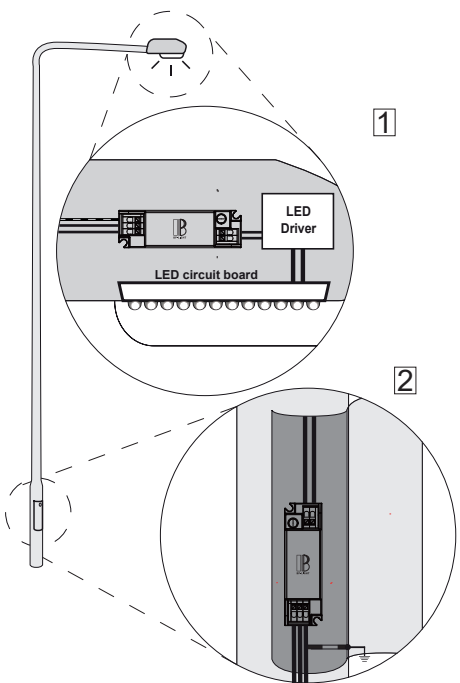


Dimensions (in mm)

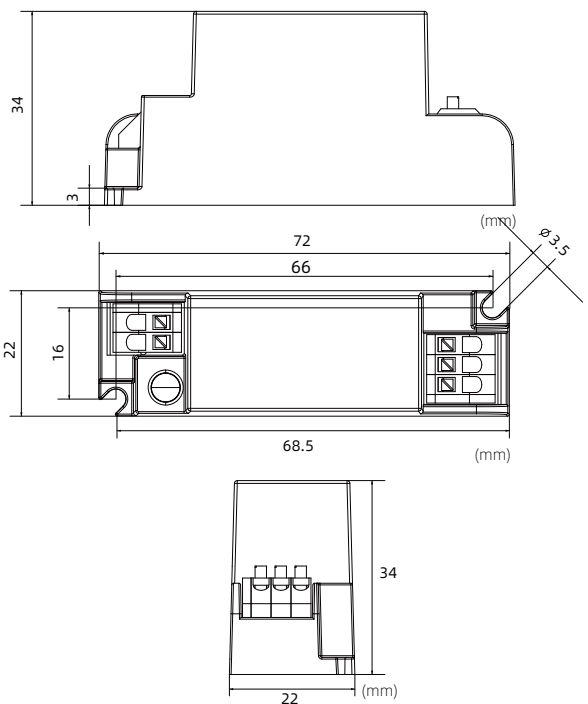

Wiring and installation

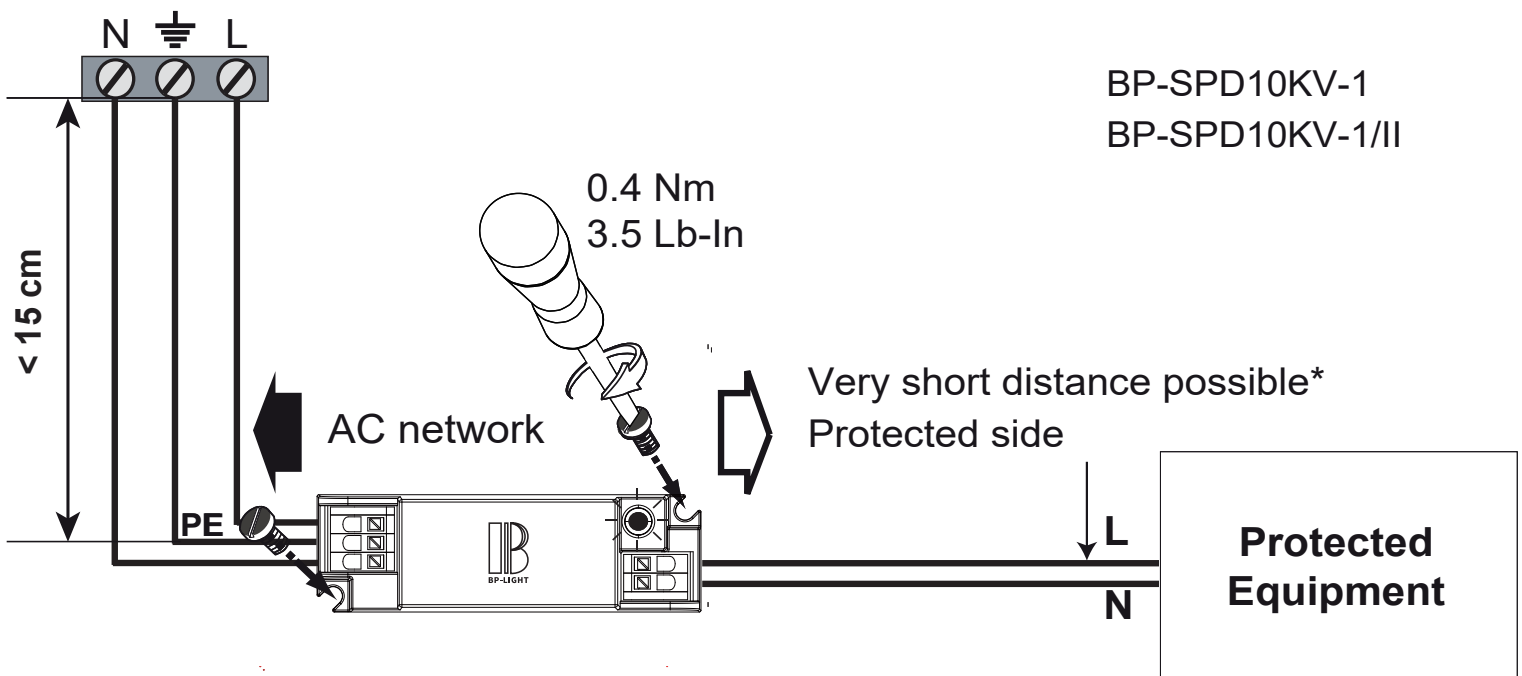

Maintenance

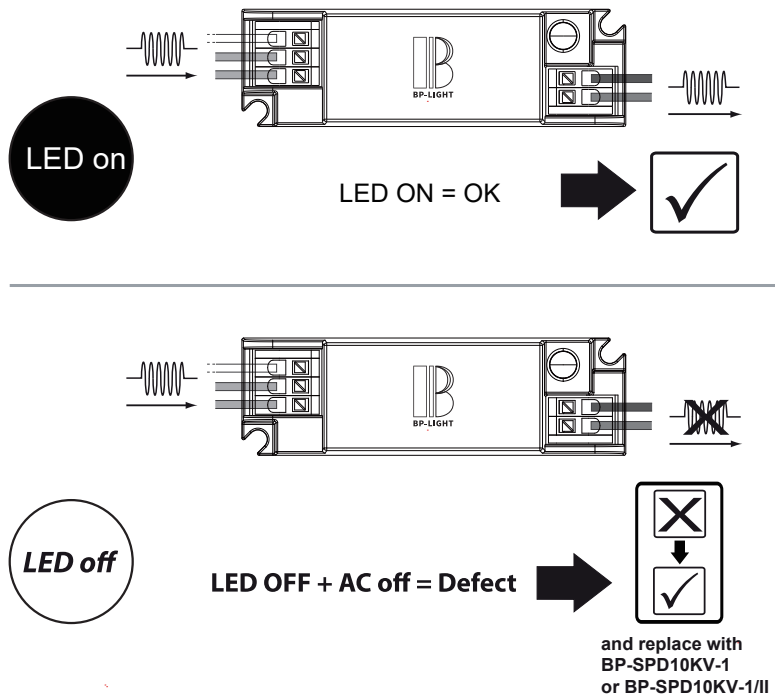

Attention !



Installation must be performed only by electrically
National electrical installation rules must be followed.
The unit must be used only as surge protector and according the conditions described in
this document.
The device must be selected according to the application and the voltage (see Table 1).
If the signal is interrupted, then the unit is defect and must be replaced.

CE

CB

RoHS

DEKRA