


INSTALLATION INSTRUCTIONS
NOTICE D'INSTALLATION

AC surge protector Type 2 (or Type 3) for LED lightingsystem.

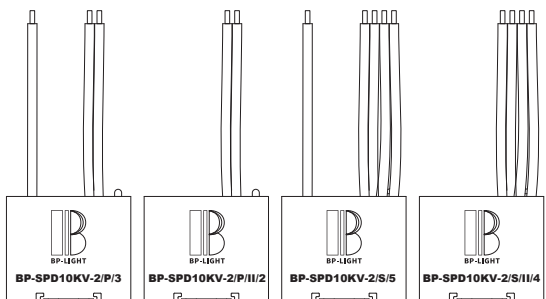


BP-SPD10KV-2/P/3
BP-SPD10KV-2/P/II/2
BP-SPD10KV-2/S/5
BP-SPD10KV-2/S/II/4


Technical Data

Table 1	P/N			
		2000 m max. 6500 ft max.		
		-40/+85°C max. -40/+185°F max.		
		indoor use only		
		Humidity range 5% to 95%		
	BP-SPD10KV-2/S/5			
	BP-SPD10KV-2/S/II/4			
	BP-SPD10KV-2/P/3			
	BP-SPD10KV-2/P/II/2			
	AC network			
	220 - 240 Vac single phase			
	AC system			
	TN			
	Characteristics			
Connection by screw				
Connection by DIN Rail				
Max Discharge Current (8/20) - I _{max} (L-N/N-PE) [kA]				
5 kA				
I _{PE}				
no current				
IP67				

Application example

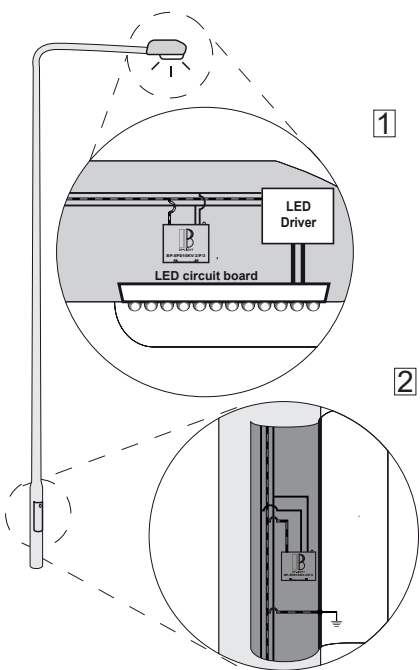


Dimensions (in mm)

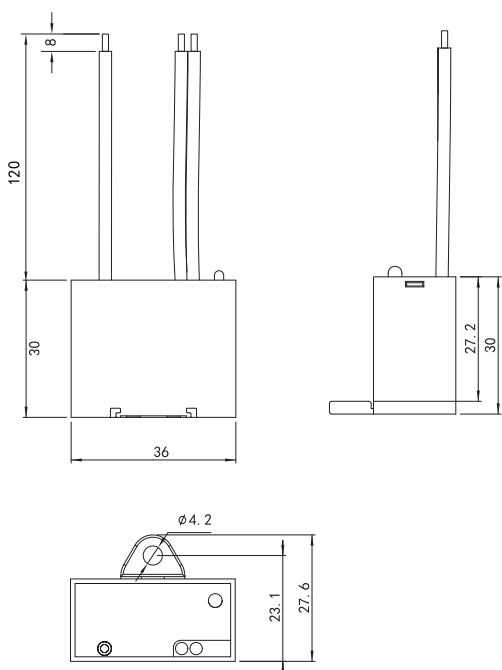


Wiring and installation


Connection by screw terminal

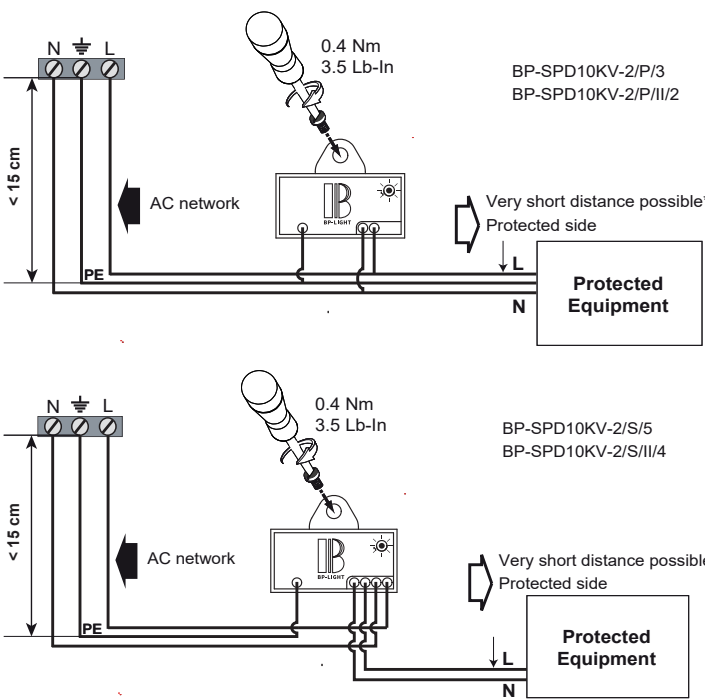

Connection by DIN Rail

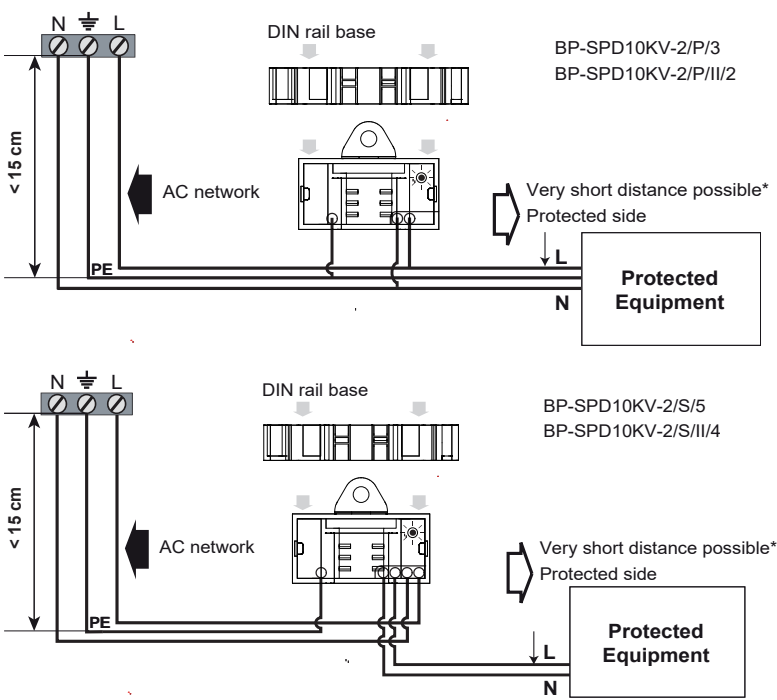

Maintenance

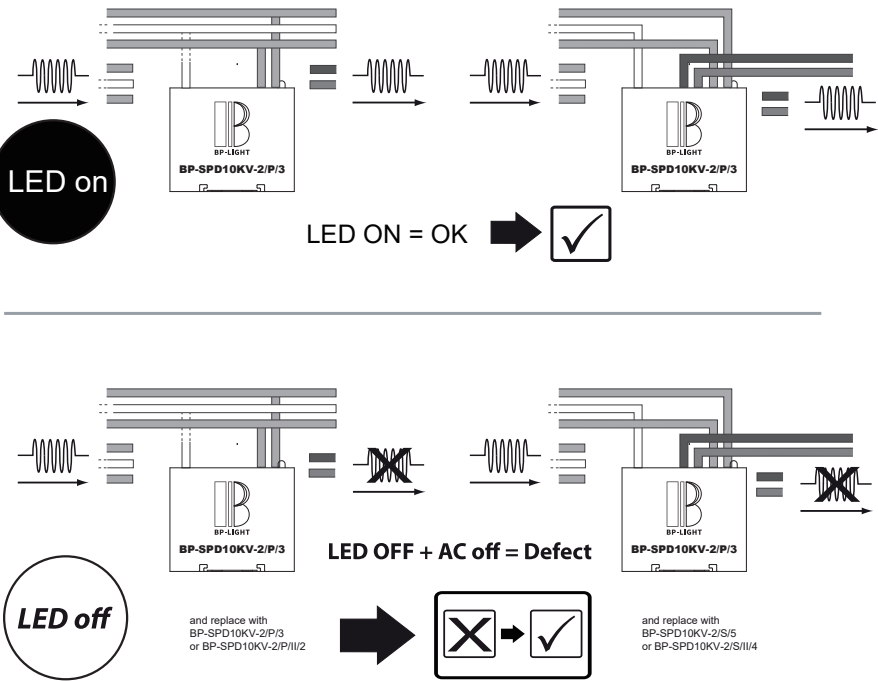

Attention !



Installation must be performed only by electrically
National electrical installation rules must be followed.
The unit must be used only as surge protector and according the conditions described
in this document.
The device must be selected according to the application and the voltage (see Table 1).
If the signal is interrupted, then the unit is defect and must be replaced.

DEKRA

CE

CB

RoHS

IP66